


# WARNING!

Failure to fully follow wiring instruction may cause serious product damage and/or injury and will immediately void all product warranties!

# AL-KO

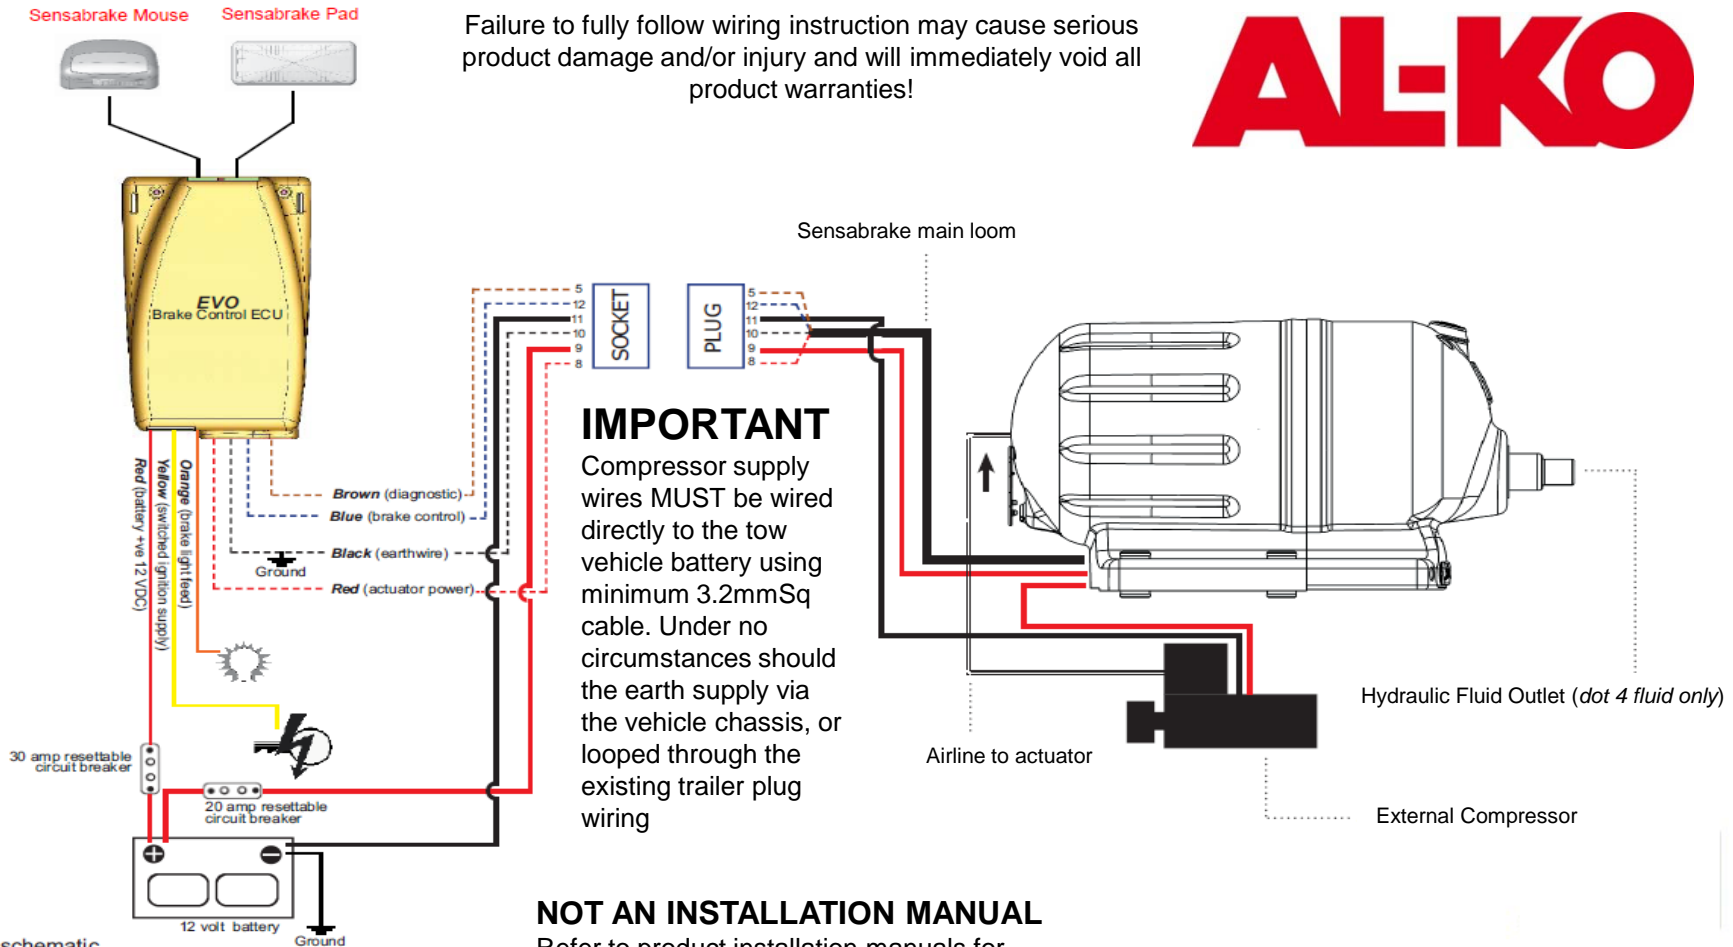

## IMPORTANT

Compressor supply wires **MUST** be wired directly to the tow vehicle battery using minimum 3.2mmSq cable. Under no circumstances should the earth supply via the vehicle chassis, or looped through the existing trailer plug wiring

## NOT AN INSTALLATION MANUAL

Refer to product installation manuals for complete actuator and controller installations

System schematic  
Model: HT-1400 HD / EVO  
Market: NZ

For warranty or service assistance contact AL-KO International on –

New Zealand (09) 255 5611

Australia +61 3 9767 3700

Email [info@alko.com.au](mailto:info@alko.com.au)

For technical assistance please call AL-KO International or your AL-KO Sensabrake supplier